


- Load rating up to 16kg
- 75% extension
- Low profile: only 20mm high

- Capacidad de carga hasta 16kg
- 75% extensión
- Perfil bajo : sólo 20mm de altura

- Portata fino a 16kg
- Estrazione 75%
- Profilo basso: solo 20mm di altezza

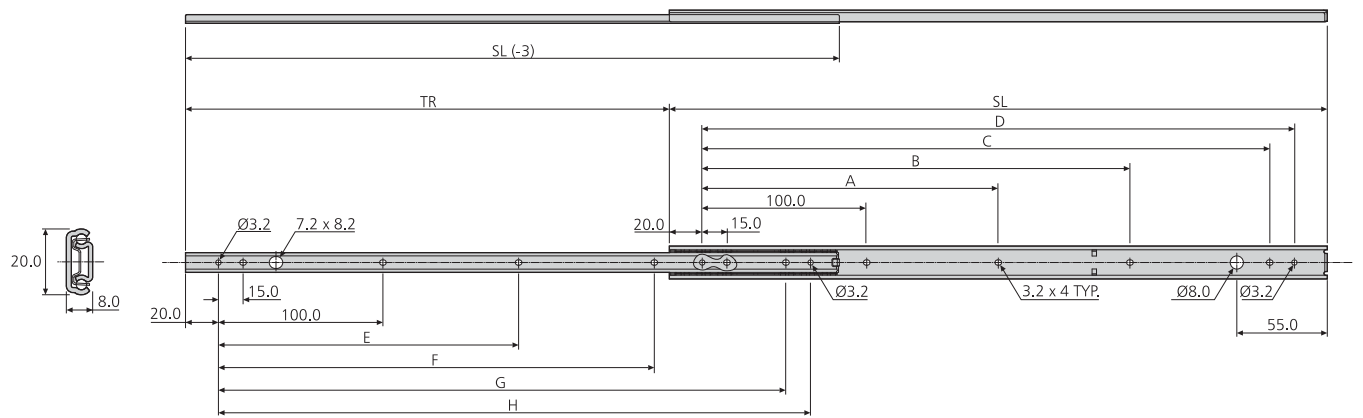

2421	mm										kg	
	SL	TR	A	B	C	D	E	F	G	H	W	L
DZ2421-0020	200	132	-	-	145.0	160.0	-	-	145.0	160.0	0.239	13
DZ2421-0025	250	182	-	-	195.0	210.0	-	150.0	195.0	210.0	0.293	15
DZ2421-0030	300	220	-	160.0	245.0	260.0	-	190.0	245.0	260.0	0.351	16
DZ2421-0035	350	257	-	210.0	295.0	310.0	-	225.0	295.0	310.0	0.408	16
DZ2421-0040	400	294	-	260.0	345.0	360.0	-	265.0	345.0	360.0	0.465	15
DZ2421-0045	450	331	205.0	310.0	395.0	410.0	190.0	300.0	395.0	410.0	0.524	13
DZ2421-0050	500	381	230.0	360.0	445.0	460.0	225.0	337.0	445.0	460.0	0.578	11

**Notes:**

- Fixing recommendation: M3 screw

**Notas:**

- Recomendaciones de montaje : tornillo M3

**Note:**

- Consigli per il fissaggio: vite M3